

## Dome Fiber Optic Splice Closure

### CV015

#### Description:

CV015 is widely applied to the splicing, distributing variable optical cables.




#### Feature:

- 1) Splice tray: Max. 6pcs, each 24cores
- 2) Cable port: 4pcs round port  $\phi 20\text{mm}$ , 1pc ellipse port for supporting cable entry without cutting. All cable ports are heat shrink sealing.
- 3) Waterproof: IP68
- 4) Wall-mounting, aerial hanger and pole holding
- 5) Material: high impact resistance PP materials with UV

#### Specification:

Model	Max. capacity	Dimension	Material	Splice tray
CV015	144 fibers	$\phi 182.5 \times 509.1$ mm	PP	6pcs, 24 fibers

**Size (mm):**

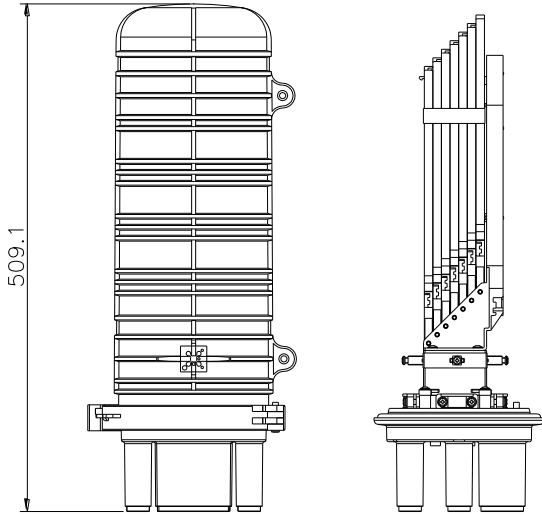

**Cable distribution:**

